


LIPS[®] E112 GAUGE HEAD POSITION SENSOR

INTRINSICALLY SAFE FOR HAZARDOUS DUST ATMOSPHERES

- Intrinsically safe for Gas and Dust to:  II 1GD
- Gauge head positioning for industrial and scientific applications
- Non-contacting inductive technology to eliminate wear
- Travel set to customer's requirement
- Compact 19 mm diameter body
- Sealing to IP67



As a leading designer and manufacturer of linear, rotary, tilt and intrinsically safe position sensors, Positek[®] has the expertise to supply a sensor to suit a wide variety of applications.

Our E112 LIPS[®] (Linear Induction Position Sensor) is ATEX approved for use in potentially explosive gas/vapour and dust atmospheres. It is designed for gauge head positioning in industrial and scientific applications and is ideal for OEMs seeking good sensor performance for arduous applications in hazardous areas. The E112, like all Positek sensors, provides a linear output proportional to displacement. Each sensor is supplied with the output calibrated to the travel required by the customer, from 10mm to 50mm and with full EMC protection built in.

Overall performance, repeatability and stability are outstanding over a wide temperature range. The sensor is very robust, the body and plunger being made of stainless steel for long service life and environmental resistance.

The plunger is spring loaded with a domed end. The E112 is easy to install with a long 1/2 inch UNF mounting thread and is supplied with two lock nuts for positioning. Environmental sealing is to IP67.

SPECIFICATION


DIMENSIONS

Body diameter	19 mm
Body Length (excluding thread)	209 mm
Mounting Thread Length	59 mm

For full mechanical details see drawing E112-11

Spring Force	1.5 - 4.5 N approx.
Independent linearity	< ± 0.25% @ 20°C
Temperature coefficients	< ± 0.01%/°C Gain & < ± 0.01%FS/°C Offset
Typical overall accuracy	< ± 0.5% / FSO
Frequency response	> 10 KHz (-3dB)
Resolution	Infinite
Noise	< 0.02% FSO

Intrinsic Safety



Ex ia IIC T4 (Ta = -40°C to +80°C)
 Ex iaD 20 T135°C (Ta = -40°C to +80°C)
 Ui: 11.4V, Ii: 0.46A, Pi: 0.51W.

maximum limits

Environmental Temperature Limits

Operating	-40 to +80°C
Storage	-40 to +125°C

Sealing

IP67

EMC Performance

EN 61000-6-2, EN 61000-6-3

Vibration

IEC 68-2-6: 10g

Shock

IEC 68-2-29: 40 g

MTBF

350,000 hrs 40°C Gf

Drawing List


E112-11 Sensor Outline

Drawings, in AutoCAD[®] dwg or dxf format, available on request.

Do you need a position sensor made to order to suit a particular installation requirement or specification? We'll be happy to modify any of our designs to suit your needs - please contact us with your requirements.

LIPS[®] E112 GAUGE HEAD POSITION SENSOR INTRINSICALLY SAFE FOR HAZARDOUS DUST ATMOSPHERES

Intrinsically safe equipment is defined as "equipment which is incapable of releasing sufficient electrical or thermal energy under normal or abnormal conditions to cause ignition of a specific hazardous atmosphere mixture in its most easily ignited concentration."

ATEX approved to  II 1GD EEx ia IIC T4
 Ex iaD 20 T135°C (Ta = -40°C to +80°C)

Designates the sensor as belonging to; Group II: suitable for all areas **except mining**, Category 1 GD: can be used in areas with continuous, long or frequent periods of exposure to hazardous gas (Zones 2 to 0) and dust (Zone 20).

Gas:

Protection class ia, denotes intrinsically safe for all zones Apparatus group IIC: suitable for IIA, IIB and IIC explosive gases.

Temperature class T4: maximum sensor surface temperature under fault conditions 135°C.

Dust:

T135°C: maximum sensor surface temperature under fault conditions 135°C.

Ambient temperature range extended to -40°C to +80°C.

Positek intrinsically safe sensors are designed to be used with a galvanically isolated barrier with safety parameters not exceeding:-

Ui: 11.4V, Ii: 0.46A, Pi: 0.51W.

Sensor can be installed with a cable length up to 150m maximum from the barrier, capacitance and inductance can be up to:-

Capacitance: 550 nF max, Inductance: 99 µH max.

Approved barriers are available from Positek[®]; there is a choice of 0.5-9.5V or 4-20mA transmission outputs.

0.5-9.5V barrier option - BX002.

4-20mA barrier option - BX003.

ATEX approved sensors suitable for gas (X series) and mining (M series) applications, are also available from Positek.

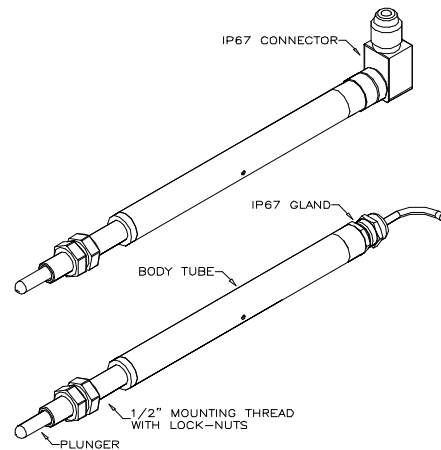


TABLE OF OPTIONS

MEASUREMENT RANGE: Factory-set to any length from 10 to 50 mm in increments of 1mm.

ELECTRICAL INTERFACE OPTIONS



A galvanic isolation barrier is required to meet IS approval - 0.5-9.5V or 4-20mA options, see barrier data sheet overleaf.

CONNECTOR/CABLE OPTIONS

Connector - Hirschmann ELWIK A 4102

Cable with PG9 gland

Cable length >50cm – please specify length in cm up to 15000cm maximum.

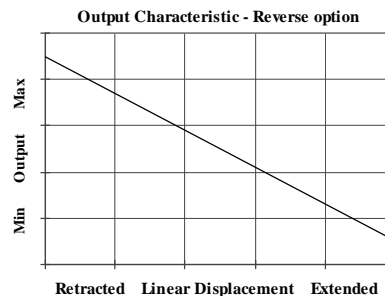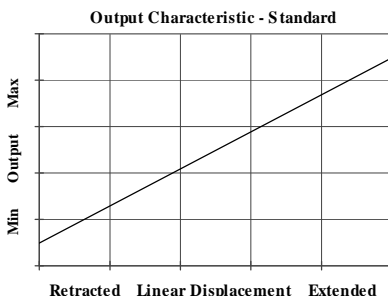


INTRINSICALLY SAFE BX002 and BX003 Sensor Barrier

Intrinsic safety means limiting the electrical energy in a system to a level incapable of causing ignition in any normal or fault condition. This can only be accomplished by installing an energy-limiting interface in the wiring between hazardous and non-hazardous areas.

Limiting the discharge of energy-stored devices in electrical equipment such as capacitors and inductors virtually eliminates the possibility of generating a spark and thus a source of ignition.

The **BX002** (0.5 to 9.5V) and **BX003** (4 to 20mA) Isolated Galvanic Barriers are the best choice for use with Positek Intrinsically Safe Position Sensors. The hazardous area circuits are certified intrinsically safe [EEx ia] IIC. Connections between hazardous and non-hazardous areas are transformer isolated, eliminating the requirement for a high-integrity intrinsically safe earth.

Choosing either a BX002 or BX003 barrier not only provides signal isolation but allows sensors to be calibrated to a specific barrier type before shipping, ensuring the respective barrier output corresponds to the sensor position over the calibrated range. The isolated power circuit limits the energy supply to the sensor to ensure the maximum safety parameters required for Positek sensors are not exceeded.

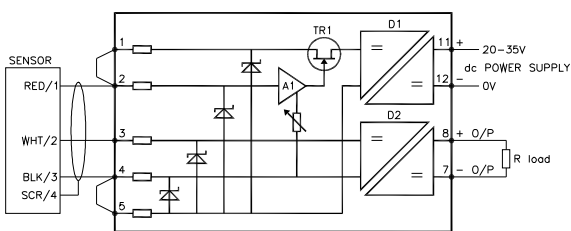

How it works; a 20-35V dc external power supply is connected to the dc/dc converter D1 which provides isolation. The output from D1 is regulated by A1 and TR1 to provide a nominal 5V supply for the sensor. The barrier and sensor can be connected by three wires; 5-wire connection capability is available to compensate for volts drop in long cable runs. D2 provides isolation between the sensors output and the barriers 0.5-9.5V or 4-20mA current loop output.

- **ATEX approved**
- **Tri-port isolated**
- **DIN rail mounted**
- **Voltage and current output versions**



SPECIFICATION

POWER SUPPLY
 Voltage 20-35V dc
 Power consumption ca. 0.7W for voltage output, 1.4W current output

INPUT CIRCUIT (terminals 1,2,3,4,5)
 Transformer isolated
 Intrinsically Safe [EEx ia] IIC
 BAS00ATEX7171
 U_{max} out = 10.4V
 I_{max} out = 46mA
 Voltage across sensor ca. 4.8 volts
 Lead resistance for 15mA 12Ω maximum (all connections)
 Input resistance terminal 3 17MΩ min

OUTPUT CIRCUIT (terminals 7/8)
 Output options
 Voltage BX002 0.5 to 9.5V
 Output resistance < 30Ω
 Current loop BX003 4 to 20mA
 Load resistance 0 - 1kΩ

TRANSFER CHARACTERISTICS
 Non-linearity: < ± 5mV for voltage outputs
 < ± 10μ A for current outputs
 Temperature drift: < 0.5mV/°C for voltage outputs
 < 1μA/°C for current outputs
 Settling time to 1% of span: < 25ms for 10-90% step change
 Rise time: < 8ms 10-90% of step change
 Bandwidth dc to 100Hz (-3dB)
 Isolation: 2500V between safe area terminals and hazardous area terminals, 50V between power rail terminals and output terminals (7 and 8)

ELECTROMAGNETIC COMPATIBILITY
 Emissions: to EN50081-2
 Immunity: to EN50082-2
 Ambient temperature range: -20° to 60°C working, -40°C to +100°C storage
 Protection class IP20

Issue	Change	Author	Date	RAN
A	First Issue	PDM	09/11/06	-
B	M12 connector, option 'J', added	PDM	12/06/07	RAN 172