


Schwank – Infrared-Heaters

primoSchwank

# THE HEAT OF THE SUN




**Schwank**  
INNOVATIVE HEATING SOLUTIONS




## Dimensions and Technical Data

primoSchwank 10/15/20/30

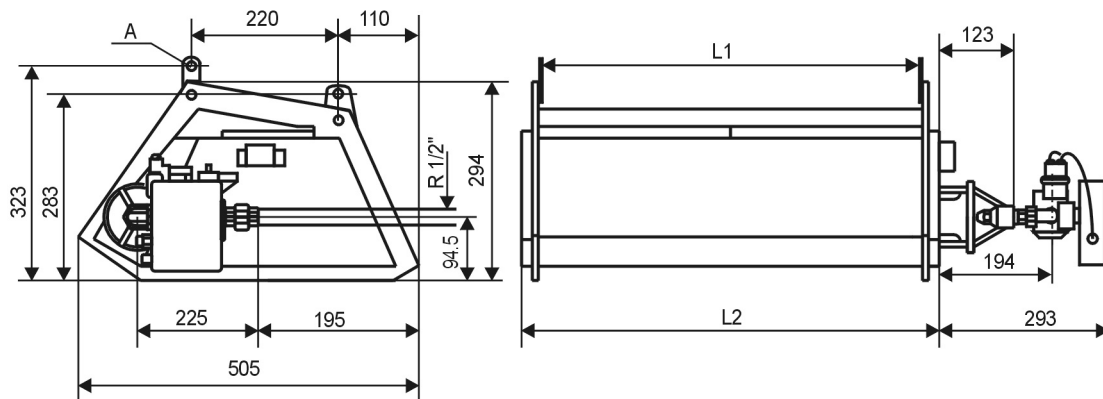

primoSchwank 40

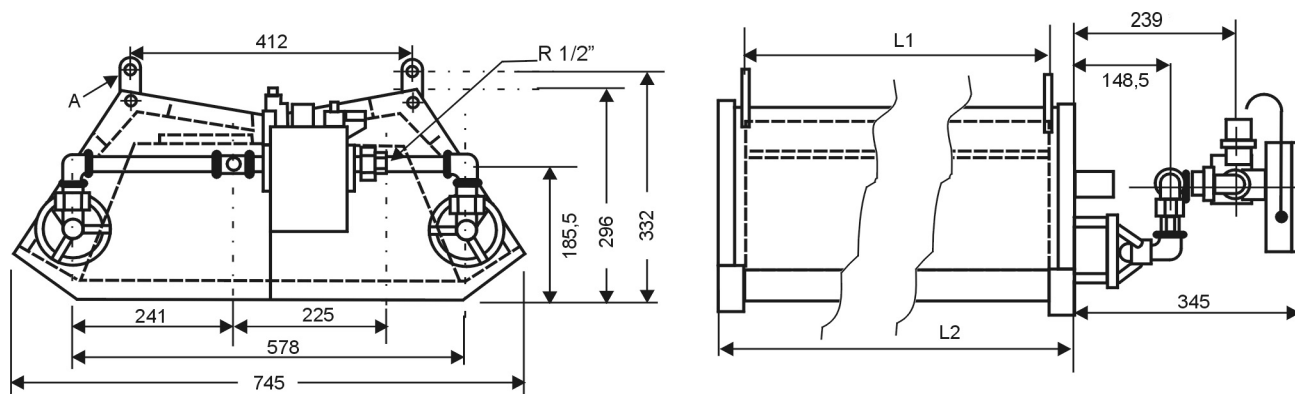

Heater Type	Gas	Gas Input [kW] H <sub>i</sub>	Gas Input [kW] H <sub>s</sub>	Gas Consumption (l)	Weight Appliance [kg]	Weight Control [kg]	Length L2 [mm]	Hanging Points L1 [mm]
primoSchwank 10 CE-0085AU0374	Nat. Gas H	9,7	10,7	0,97 m <sup>3</sup> /h	10,0	1,4	605	553
	Propane	9,7	10,7	0,76 kg/h	10,0	1,4	605	553
primoSchwank 15 CE-0085AU0374	Nat. Gas H	14,5	16,0	1,45 m <sup>3</sup> /h	14,0	1,4	882	830
	Propane	14,5	16,0	1,13 kg/h	14,0	1,4	882	830
primoSchwank 20 CE-0085AU0374	Nat. Gas H	19,4	21,3	1,95 m <sup>3</sup> /h	17,5	1,4	1160	1108
	Propane	19,4	21,3	1,52 kg/h	17,5	1,4	1160	1108
primoSchwank 30 CE-0085AU0374	Nat. Gas H	29,1	32,0	2,92 m <sup>3</sup> /h	23,0	1,4	1714	1662
	Propane	29,1	32,0	2,28 kg/h	23,0	1,4	1714	1662
primoSchwank 40 CE-0085AU0374	Nat. Gas H	38,8	42,6	3,90 m <sup>3</sup> /h	30,1	2,3	1157	1108
	Propane	38,8	42,6	3,01 kg/h	30,1	2,3	1157	1108

1) gas consumption: Nat. Gas H: H<sub>in</sub> = 9,97 kWh/m<sup>3</sup> Propane: H<sub>in</sub> = 12,87 kWh/kg

## Application

Appliance for industrial heating,  
transfer of radiant heat is through infrared radiation

## Min. Connection Pressure

Single-stage control:	Double-stage control:
Nat. Gas H: 16 mbar	Nat. Gas H: 30 mbar
Propane: 32 mbar	Propane: 65 mbar

## Max. Connection Pressure

Nat. Gas, Propane: 100 mbar

## Electrical Connection

Single-phased AC 230 V, N, PE  
50 Hz (ca. 33 VA)

## Exhaust Flue

According to national standards

## Gas Connection

Threaded fitting R=1/2", female

## Hanging Points

See 4 hanging points (A) at the drawing